SA3-02M

EN Switching actuator 2-channel

Characteristics

- Actuator SA3-02M is designed for switching two various appliance and loads with potentialless contact.
- SA3-02M is a switching actuator containing 2 independent relays with changeover potentialless contacts.
- Maximum load per contact is 16 A/4000 VA/AC1.
- Each of the two output contacts are individually controllable and addressable.
- Both relays are individually decorated input terminals, and therefore can switch various independent potentials.
- The actuator is designed for switching up to two various appliances and loads relay output (potentialless contact).
- Thanks to changeover contacts, it can be used to control one 230 V power (such as blinds, shutters or awnings) with appropriate bridging, the contacts can secure hardware blocking the possibility of simultaneous switching of the phase on both outputs, see example of connection.
- LEDs on the front panel signal the status of each output.
- Contact status of each relay can be changed separately and manually by control buttons on the front panel.
- Switching actuators SA3-02M are normally supplied in the option $AgSnO_2$ contact material.
- SA3-02M in 1-MODULE version is designed for mounting into a switchboard, on DIN rail EN60715.

General instrucions

CONNECTION INTO THE SYSTEM

Connect the product to the system according to the connection diagram listed with each product. The wires of data BUS of iNELS system are connected to the terminals BUS + (standard red wire for single-pair wiring, red and yellow for two-pair wiring) and BUS - (standard black wire for single-pair wiring, black and white for two-pair wiring), and it is not possible to change the terminals. A twisted pair of wires must be used for the data BUS with a wire diameter at least 0.8 mm. Data communications and power supply to the units are led in a single pair of wires, and you must observe the power cable size with regard to voltage loss on the wire and the maximum power draw.

CAPACITY AND CENTRAL UNIT

It is possible to connect to the central unit CU3-01M or CU3-02M two independent BUSes by means of terminals BUS1+, BUS1- and BUS2+, BUS2-. It is possible to connect to each BUS up to 32 units, so it is possible to connect directly to the central unit a total of 64 units. It is necessary to comply with the requirement of a maximum load of one BUS line – maximum up to 1000 mA current. It is the sum of the rated currents of the units connected to the BUS line, other units can be connected using the units MI3-02M, which generate further BUSes. These are connected to the CU3 unit via the system BUS EBM and you can connect a total of 8 units via EBM BUS to the central unit MI3-02M.

COMMUNICATION BUS OF THE SYSTEM

The bus must have a cable created by a twisted pair of wires for data BUS of the system with a minimum wire diameter of 0.8 mm. A shielded cable must be used in case of installation of cables of the BUS in an environment with the possibility of electromagnetic interference (e.g. when running along power lines, near electric machines and devices, during LV passage through a distributor, etc.). We highly recommend using the cable JYSTY 2x2x0.8 for BUS. The bus cable is installed in accordance with its mechanical properties given by the producer (into a pipe / bar, under plaster, underground, suspended, etc.). To increase the mechanical resistance of cables, we always recommend installing the cable into an electrical insulation pipe of the appropriate diameter. The total length of wires of the BUS for CU3-01M (CU3-02M), or MI3-02M, can be 1100 m (550 m for each BUS). The topology of the communications BUS is open with the exception of topology of the circuit. It is necessary to use the cable FTB CAT5e or higher for the system BUS EBM – one pair of wires is connected to the terminals EBM+ and EBM- and the second pair of wires can be curled and connected to GND terminal (just on the one side of EBM BUS). The typology of EBM system bus is strictly linear and must be terminated at both ends with a nominal resistance value of 120 Ω. It is the installer's responsibility to follow all instructions in the manual and all installation requirements for the RS485 BUS.

SUPPLYING THE SYSTEM

For supplying power to system units, it is possible to use the power sources of ELKO EP titled PS3-100/iNELS. We recommend backing up the system with backup batteries connected to the source of PS3-100/iNELS (see sample diagram of connecting the control system).


GENERAL INFORMATION

The unit is capable of working as an independent element without a central unit only in very limited scope of its functions. For full utility of the unit, it is necessary for the unit to be connected to the central unit of the series CU3, or to a system that already contains this unit as its expansion to include further system.

All unit parameters are set through the central unit series CU3 in the software iDM3.


There is LED RUN diode on the unit front panel for indication of supply voltage and communication with the central unit series CU3. In case that the RUN diode flashes at regular intervals, so there is standard communication between the unit and BUS. If the RUN diode lights permanently, so the unit is supplied from BUS, but there is no communication between BUS and unit. In case that RUN diode is OFF, so there is no supply voltage on the terminals BUS+ and BUS-.

Description of device

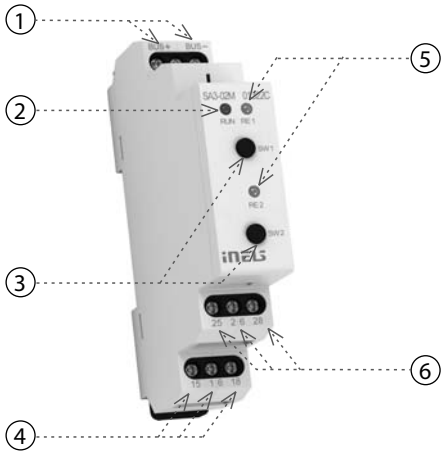

1. Data BUS
2. LED inditaction of unit´s state
3. Control buttons
4. Relay contacts
5. LED output indication
6. Relay contacts

Connection

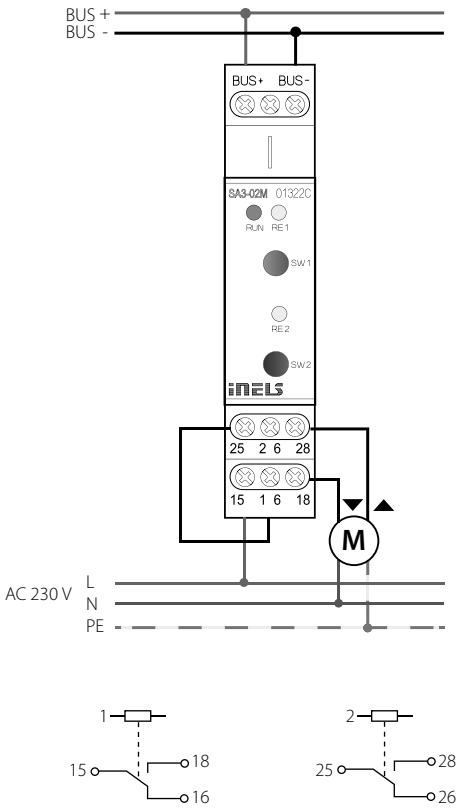

Technical parameters

SA3-02M

Outputs	
Output:	2x changeover 16 A/AC1
Switching voltage:	250 V AC1, 24 V DC
Switching load:	4000 VA/AC1, 384 W/DC
Surge current:	30 A; max. 4 s at duty cycle 10%
Output relays separated from all internal circuits:	reinforced Insulation (Cat. II surges by EN 60664-1)
Isolation between relay outputs RE1 and RE2:	reinforced Insulation (Cat. II surges by EN 60664-1)
Isolates. voltage open relay contact:	1 kV
Minimal switching current:	100 mA
Switching frequency / no load:	1200 min^{-1}
Switching frequency / rated load:	6 min^{-1}
Mechanical lifetime:	3x 10^7
Electrical lifetime AC1:	0.7x 10^5
Outputs indication:	2x yellow LED
Communication	
Installation BUS:	BUS
Power supply	
Supply voltage / tolerance:	27 V DC, -20 / +10 %
Rated current:	50 mA (at 27 V DC), from BUS
Status indication unit:	green LED RUN
Connection	
Terminal:	max. 2.5 mm^2 / 1.5 mm^2 with sleeve
Operating conditions	
Air humidity:	max. 80 %
Operating temperature:	-20 .. +55 °C
Storing temperature:	-30 .. +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operation position:	any
Installation:	switchboard on DIN rail EN 60715
Design:	1-MODUL
Dimensions and weight	
Dimensions:	90 x 17.6 x 64 mm
Weight:	82 g

Warning

Before the device is installed and operated, read this instruction manual carefully and with full understanding and Installation Guide System iNELS3. The instruction manual is designated for mounting the device and for the user of such device. It has to be attached to electro-installation documentation. The instruction manual can be also found on a web site www.inels.com. Attention, danger of injury by electrical current! Mounting and connection can be done only by a professional with an adequate electrical qualification, and all has to be done while observing valid regulations. Do not touch parts of the device that are energized. Danger of life-threat! While mounting, servicing, executing any changes, and repairing it is essential to observe safety regulations, norms, directives and special regulations for working with electrical equipment. Before you start working with the device, it is essential to have all wires, connected parts, and terminals de-energized. This instruction manual contains only general directions which need to be applied in a particular installation. In the course of inspections and maintenance, always check (while de-energized) if terminals are tightened.