LBC3-02M

EN Dimming actuator for electronic ballasts, 2-channel

Characteristics

- LBC3-02M is an analog two-channel actuator designed to control dimmable ballasts of fluorescent lamps or other light sources controlled by signal 0 (1) - 10V DC.
- In the iDM3, it is possible to set the output mode 0 (1) - 10V DC.
- During analog voltage output 0 (1) - 10V DC control, relay contact automatically switches power supply to light ballast (0% = relay OFF, 1-100% = relay ON)
- LBC3-02M contains 2 independent analog voltage outputs 0 (1)-10V DC and their dependents 2 relays with potential-free contact.
- Maximum contacts load 16 A/4000 VA/AC1.
- Each of two channels is separately controllable and addressable.
- LEDs on front panel signals status of each channel.
- With control buttons on the front panel, it is possible to change the status of each channel separately.
- LBC3-02M in 3-MODULE version is designed for mounting into a switchboard / DIN rail EN60715.

General instrucions

CONNECTION INTO THE SYSTEM

Connect the product to the system according to the connection diagram listed with each product. The wires of data BUS of iNELS system are connected to the terminals BUS+ (standard red wire for single-pair wiring, red and yellow for two-pair wiring) and BUS- (standard black wire for single-pair wiring, black and white for two-pair wiring), and it is not possible to change the terminals. A twisted pair of wires must be used for the data BUS with a wire diameter at least 0.8 mm. Data communications and power supply to the units are led in a single pair of wires, and you must observe the power cable size with regard to voltage loss on the wire and the maximum power draw.

CAPACITY AND CENTRAL UNIT

It is possible to connect to the central unit CU3-01M or CU3-02M two independent BUSes by means of terminals BUS1+, BUS1- and BUS2+, BUS2-. It is possible to connect to each BUS up to 32 units, so it is possible to connect directly to the central unit a total of 64 units. It is necessary to comply with the requirement of a maximum load of one BUS line - maximum up to 1000 mA current. It is the sum of the rated currents of the units connected to the BUS line, other units can be connected using the units MI3-02M, which generate further BUSes. These are connected to the CU3 unit via the system BUS EBM and you can connect a total of 8 units via EBM BUS to the central unit MI3-02M.

COMMUNICATION BUS OF THE SYSTEM

The BUS must have a cable created by a twisted pair of wires for data BUS of the system with a minimum wire diameter of 0.8 mm. A shielded cable must be used in case of installation of cables of the BUS in an environment with the possibility of electromagnetic interference (e.g. when running along power lines, near electric machines and devices, during LV passage through a distributor, etc.). We highly recommend using the cable JYSTY 2x2x0.8 for BUS. The BUS cable is installed in accordance with its mechanical properties given by the producer (into a pipe / bar, under plaster, underground, suspended, etc.). To increase the mechanical resistance of cables, we always recommend installing the cable into an electrical insulation pipe of the appropriate diameter. The total length of wires of the BUS for CU3-01M (CU3-02M), or MI3-02M, can be 1.100 m (550 m for each BUS). The topology of the communications BUS is open with the exception of topology of the circuit. It is necessary to use the cable FTP CAT5e or higher for the system BUS EBM - one pair of wires is connected to the terminals EBM+ and EBM- and the second pair of wires can be curled and connected to GND terminal (just on the one side of EBM BUS). The typology of EBM system BUS is strictly linear and must be terminated at both ends with a nominal resistance value of 120 Ω. It is the installer's responsibility to follow all instructions in the manual and all installation requirements for the RS485 BUS.

SUPPLYING THE SYSTEM

For supplying power to system units, it is possible to use the power sources of ELKO EP titled PS3-100/iNELS. We recommend backing up the system with backup batteries connected to the source of PS3-100/iNELS (see sample diagram of connecting the control system).

GENERAL INFORMATION


To operate the unit, it is necessary that the unit is connected to a central unit CU3 series, or to a system that already contains this unit as its expansion to include further system.

All unit parameters are set through the central unit series CU3 in the software iDM3.

There is LED RUN diode on the unit front panel for indication of supply voltage and communication with the central unit series CU3. In case that the RUN diode flashes at regular intervals, so there is standard communication between the unit and BUS. If the RUN diode lights permanently, so the unit is supplied from BUS, but there is no communication between BUS and unit. In case that RUN diode is OFF, so there is no supply voltage on the terminals BUS+ and BUS-.


Note: Analog output is galvanically connected to BUS.

Description of device

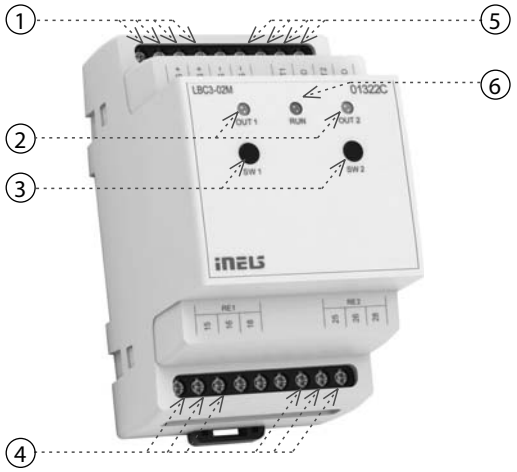

1. Data BUS
2. Output LED indication
3. Control buttons
4. Relay contacts
5. Outputs 0(1) -10 V DC
6. LED indication of unit´s

Connection

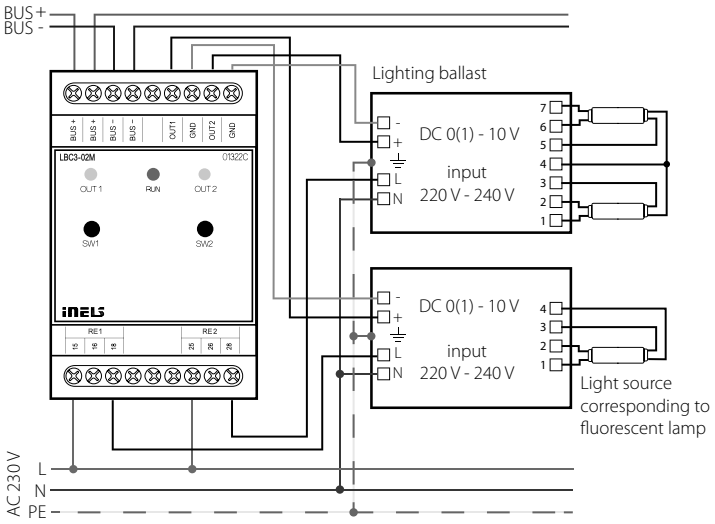

Technical parameters

LBC3-02M

Inputs	
Number of control buttons:	2 buttons on the front panel
Outputs	
Output:	2x 0(1)-10V/10 mA 2x changeover 16 A/AC1
Switching voltage:	250 V AC1, 24 V DC
Switching capacity:	4000 VA/AC1, 384 W/DC
Peak current:	30 A; max. 4 s. at duty cycle 10%
Insulation voltage between individual relay outputs RE1 and RE2 and internal circuits:	4 kV reinforced Insulation (Cat. II surges by EN 60664-1)
Isolates. voltage open relay contact:	1 kV
Minimal switched current:	100 mA
Frequency of switching / no load:	1200 min^{-1}
Frequency of switching / rat. load:	6 min^{-1}
Mechanical life:	$3x10^7$
Electrical life AC1:	$0.7x10^5$
Output indication:	2x yellow LED
Communication	
Installation BUS:	BUS
Power supply	
Supply voltage / tolerance:	27 V DC, -20 / +10 %
Rated current:	60 mA (at 27 V DC), from BUS
Status indication unit:	green LED RUN
Connection	
Terminal:	max. 2.5 mm^2 / 1.5 mm^2 with sleeve
Operating conditions	
Air humidity:	max. 80 %
Operating temperature:	-20 .. +55 °C
Storing temperature:	-30 .. +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	switchboard on DIN rail EN 60715
Design:	3-MODULE
Dimensions and weight	
Dimensions:	90 x 52 x 65 mm
Weight:	129 g

Warning

Before the device is installed and operated, read this instruction manual carefully and with full understanding and Installation Guide System iNELS3. The instruction manual is designated for mounting the device and for the user of such device. It has to be attached to electro-installation documentation. The instruction manual can be also found on a web site www.inels.com. Attention, danger of injury by electrical current! Mounting and connection can be done only by a professional with an adequate electrical qualification, and all has to be done while observing valid regulations. Do not touch parts of the device that are energized. Danger of life-threat! While mounting, servicing, executing any changes, and repairing it is essential to observe safety regulations, norms, directives and special regulations for working with electrical equipment. Before you start working with the device, it is essential to have all wires, connected parts, and terminals de-energized. This instruction manual contains only general directions which need to be applied in a particular installation. In the course of inspections and maintenance, always check (while de-energized) if terminals are tightened.