
128, av. du Maréchal-de-Lattre-de-Tassigny - 87045 LIMOGES Cedex
Tel.: 33(0)5 55 06 87 87 - Fax: 33(0)5 55 06 88 88
www.legrand.com

Céliane™
Waterproof lighting control

Cat. No : CG8001

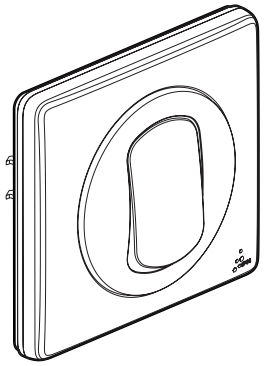


1. USE

Waterproof lighting control.
Screw and/or claw fixing in box depth 40 mm minimum.

2. RANGE

Description	White
Waterproof sof switch or two-way switch, complete delivered	CG8001

3. DIMENSIONS (mm)

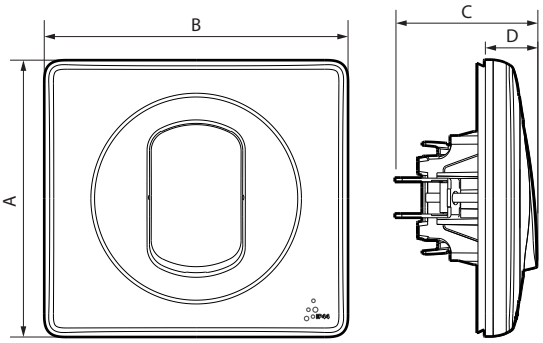

A	B	C	D
89	97	45	17

4. CONNECTION

Type of terminals: automatic
Terminal capacity: 2 x 2.5 mm²
Stripping length: 12 mm

5. TECHNICAL CHARACTERISTICS

5.1 Mechanical characteristics
Protection against impacts: IK 04
Protection against solid bodies ands liquids: IP 44

5.2 Material characteristics
Mechanism casing: PC
Support frame: PA 6.6 + steel insert
Seal: SEBS

Ring: ABS
Rocker plate: PC
Plate: ABS

Halogen-free
UV-resistant

Self-extinguishing:
850°C/30 s for insulating components holding live parts in place.
650°C 30 s for other insulating components.

5.3 Electrical characteristics
Voltage: 250 V~
Current: 10 AX
Max. power for self-ballasted lamps: 100 W

5.4 Climate characteristics
Storage temperature: -10°C to +70°C
Usage temperature: -5°C to +35°C

6. ECARE

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistant to the following products: Hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes
Anios, Surfanios, Bactilysine, diluted hydrogen peroxide 35%.

Caution: Always test before using special cleaning products.

No paint should be applied to the plate.

7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
See e-catalogue.