

128, av. du Maréchal-de-Lattre-de-Tassigny - 87045 LIMOGES Cedex
Tel: 0 (+33) 5 55 06 87 87 - Fax: 0 (+33) 5 55 06 88 88
www.legrand.com

New Suno™ Double USB sockets Type A+C,Type C 20 W power delivery

Cat. No(s): 7 211 31A/48 - 7 212 31A/48 - 7 213 31A/48 - 7 214 31A/48

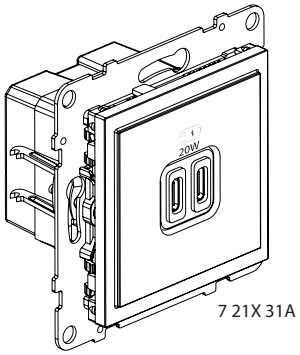

7 21X 31A

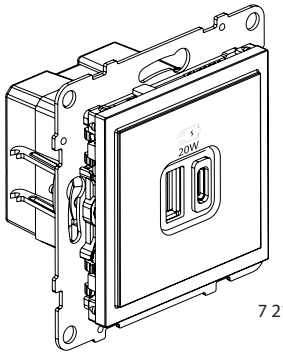

7 21X 48


1. USE

For recharging portable devices such as phones, smartphones, tablets, MP3, MP4, loudspeakers, watches, game consoles, powerbanks.
Fixing with screw and/or claw.

2. RANGE

Description	White	Ivory	Aluminium	Black
2XUSB TYPE C+C	7 211 31A	7 212 31A	7 213 31A	7 214 31A
2XUSB TYPE A+C	7 211 48	7 212 48	7 213 48	7 214 48

3. DIMENSIONS (mm)

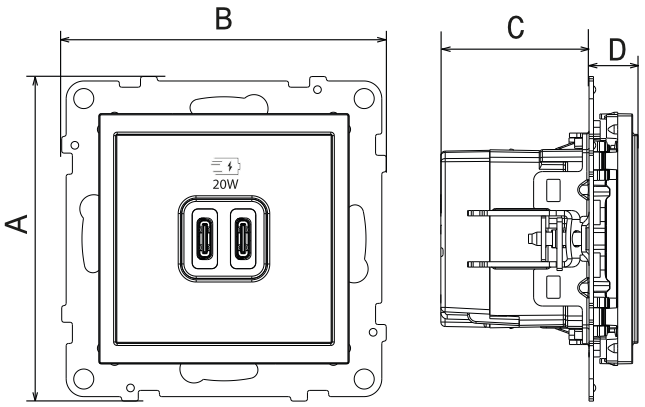

A	B	C	D
72.9	72.9	33.3	11

4. CONNECTION

Flexible or rigid cables compatible.
Type of terminals:
Screw terminal
Terminal capacity:
2 X 2.5mm²
Stripping length:
6mm
Usb socket:
Prewired socket

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP20
Protection against impact: IK04

■ 5.2 Material characteristics

Polygloss apperaance
Material: - Base: PC
- Socket covers: ABS
- Halogen-free
- UV resistant

Self-extinguishing:
850°C/30 s for installing components holding live parts in place
650°C/30 s for other insulating components

■ 5.3 Electrical characteristics

All values listed below are measured at an ambient temperature +20°C and after 30 minutes of operation.

Nominal input voltage	100-240V~	
Nominal input frequency	50/60Hz	
Max. output power	20.0W	
Nominal input current	0.5A	
Max. nominal output current	3.0A	
Nominal output voltage	5.0 V⎓	
Average efficiency in active mode	88% → 1 output	85% → 2 outputs
Stand-by power consumption	0.08W	
Consumption class without load and average level of efficiency: Level VI		
Protection class	II - Low voltage	

5. TECHNICAL CHARACTERISTICS (continued)


One Output A:
5.0V ⎓ 3.0A
9.0V ⎓ 2.0A
12.0V ⎓ 1.5A
One Output C:
5.0V ⎓ 3.0A
9.0V ⎓ 2.2A
12.0V ⎓ 1.6A
Two Outputs:
5.0V ⎓ 1.5A
5.0V ⎓ 1.5A

***Note:** European Regulation No. 278/2009 of 6 April 2009, Directive 2009/125/EC on eco-design requirements for AC/DC power supplies.

Note: To optimize the charging time of your device, ensure turn it off during the charging phase.

■ 5.4 Climate characteristics
Usage temperature: 0°C to +45°C
Storage temperature: -20°C to +70°C

■ 5.5 Support
Material of support: -Metal
Angular adjusting:



6. MAINTENANCE

Surface cleaning with a cloth.

Do not use:
Acetone, tar remover, trichlorothylene.

Maintenance with the following products:
Hexane, Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products.

Caution: Always test before using other special cleaning products.

7. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (Cat. Nos 7 211 31A - 7 212 31A - 7 213 31A - 7 214 31A - 7 211 48 - 7 212 48 - 7 213 48 - 7 214 48) complies with directive 2014/53/EU.
The full text of the EU declaration of conformity is available on the following website: www.legrand.com/ecatalogue