Lamp holder with led



Use

Signalling indicator lights with LED for indicator or illuminated functions.

Range

Designation	Item
lamp-holder withe with led included - 230 Va.c. - 3 colour labels (red, green, blu) 1 module	☐ R4371V230
lamp-holder withewith led included - 12/24 Va.c. - 3 colour labels (red, green, blu) 1 module	☐ R4371V12

Overall dimensions (mm)

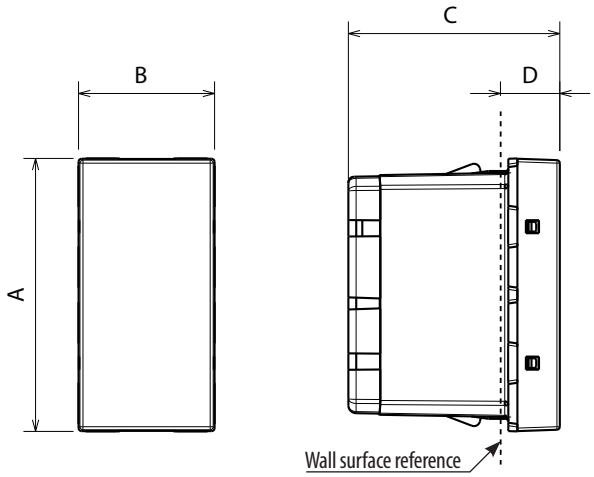

A	B	C	D
45.1	22.5	34.9	9.8

Connection

Terminal type: screw clamp
Terminal capacity: 2 x 1.5 mm^2 or 1 x 2.5 mm^2 max
Stripping length: 8 mm
Compatible with flexible or rigid cables

Technical characteristics

- **Protection index**
(considering a complete installation, including cover plate)
Penetration by solid bodies/liquid: IP40

- **Mechanical characteristics**
Impact test: IK 04

- **Material characteristics**
Material:
Case: PC (Polycarbonate)
Key cover: PC
UV resistent

- **Self-extinguishing:**
850° C / 30 s for insulating parts holding live parts in place
650° C / 30 s for other parts made of insulating materials

- **Electrical characteristics**
R4371V230
Voltage: 127/230 V a.c.
Power consumption : 0.6W

R4371V12
Voltage: 12/24 V a.c.
Power consumption : 0.6W

- **Climatic characteristics**
Storage temperature: - 10° C to + 70° C
Use temperature: - 5° C to + 35° C

Cleaning

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.
Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards
Refer to e.catalogue.