LIGHTnow

YW4164T13 - YG4164T13 - YD4164T13
YW4164T23 - YG4164T23 - YD4164T23

Socket outlet - Swiss standards



Y_4164T13



Y_4164T23

Use

Socket outlets: Swiss standards.

Range

Designation	Cat. No.
2 P+E 10 A 250 Vac socket Type 13 shielded tulip contact Ø 4 mm	☐ YW4164T13 ▒ YG4164T13 ■ YD4164T13
2 P+E 16 A 250 Vac socket Type 23 shielded tulip contact Ø 4 mm	☐ YW4164T23 ▒ YG4164T23 ■ YD4164T23

Colors: ☐ White ▒ Stone ■ Dark

Overall dimensions (mm)

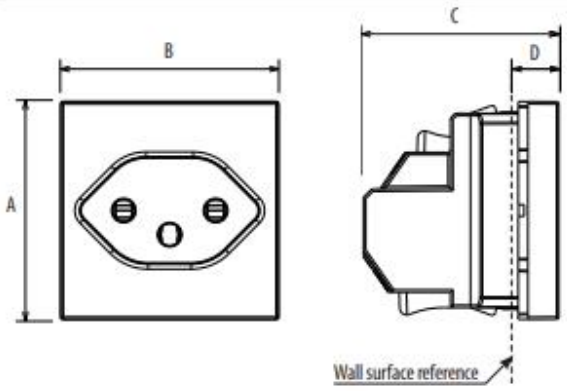

	A	B	C	D
Y.4164T13	45	45	30	10
Y.4164T23	45	45	30	10

Connection

Terminal type: automatic clamps
Terminal capacity: 2 x 2.5mm²
max Stripping length: 12 mm

Technical characteristics

- **Protection index**
(considering a complete installation, including cover plate)
Penetration by solid bodies/liquid: IP20D

- **Mechanical characteristics**
Impact test: IK 04

- **Material characteristics**
Material:
Case and Key cover: PC (Polycarbonate)

Halogen free.

UV resistant.

Self-extinguishing:
850° C / 30 s for insulating parts holding live parts in place
650° C / 30 s for other parts made of insulating materials

- **Electrical characteristics**
Voltage: 250V a.c.
Current: Y.4164T13 10A
Y.4164T23 16A

- **Climatic characteristics**
Storage temperature: - 10° C to + 70° C Use
temperature: - 5° C to + 35° C

Cleaning

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC/EN 60884-1
Refer to e.catalogue.