
via Messina, 38 - 20154 MILANO - Italia
Tel : 02/3480600 - Fax : 02/3480610
www.bticino.com

AXOLUTE

Cat. No(s): HD4051A20 - HC4051/20 - HS4051/20

Basic control devices
1-way switch



1. USE


Rocker, axial or style control device for lighting and other control.

2. RANGE

Designation	Cat. No.
1-way switch - 1 P - 20 AX - 250 VAC 1 module	☐ HD4051A20 ▒ HC4051/20 ■ HS4051/20

Color code:
☐ White
▒ Tech
■ Anthracite

3. OVERALL DIMENSIONS (mm)

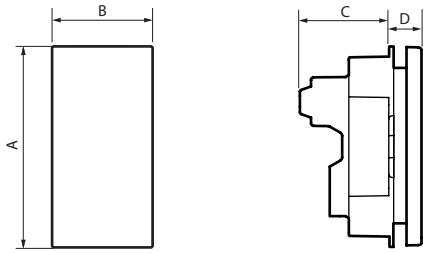

Rocker	A	B	C	D
2 modules	45	22.5	24.5	9.5

4. CONNECTION

Stripping length (rigid or flexible cables): 9 mm
Terminals with screws

5. TECHNICAL CHARACTERISTICS

■ 5.1 Protection index
Penetration by solid bodies/liquid: IP 21 D
Impact test: IK 04

■ 5.2 Material characteristics
Material: Polycarbonate for mechanism case
PC for key cover
Colour: White, Tech, Anthracite
Halogen free.
UV resistant.
Self-extinguishing:
- 850° C / 30 s for insulating parts holding live parts in place.
- 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics
Voltage: 250 VAC
Current: 20 AX

■ 5.4 Climatic characteristics
Storage and operating temperatures: - 5° C to + 35° C

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
Refer to e.catalogue.