

GBP3-60R/B



GBP3-60L/W


EAN code*

Technical parameters	GBP3-60
Inputs	
Inputs:	2x AIN/DIN
Resolution:	by setting 10-bit
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2
Type external sensor:	TC/TZ
Temperature measurement range:	-20°C to +120°C
Temperature measurement accuracy:	0.5°C from the range
Illuminance sensor:	1 ... 100 000 Lx
Buttons	
Number of control buttons:	6
Type:	Capacitive
Indication:	Coloured illuminated symbol
Outputs	
Acustic output:	piezo-changer
Tactile output:	Vibration motor
Communication	
Installation BUS:	BUS
Power supply	
Supply voltage / tolerance:	27 V DC, -20 / +10 %
Rated current:	25-50 mA (at 27V DC), from BUS
Connection	
Terminals:	0.5 - 1 mm²
Operating conditions	
Relative humidity:	max. 80 %
Operating temperature:	-20 .. +55 °C
Storing temperature:	-30 .. +70 °C
Protection degree:	IP20
Overvoltage category:	II.
Pollution degree:	2
Operation position:	any
Installation:	on the wall, observing the conditions for correct installation of the thermostat
Dimensions and weight	
Dimensions:	236 x 94 x 36 mm
Weight:	380 g

* Order codes are available in the iNELS price list.

- Glass bedside panel GBP3-60 is part of a comprehensive range of iNELS control units for guest room management system (GRMS). Bedside panel is composed from three modules, of which one is module of touch buttons and two are modules to power for example mobile devices.
- The GBP3-60 is available in several designs, making it a very flexible and effective solution for a variety of projects. The following variants are available:
  - Left / Right version provides the same ease of operation from both sides of the bed.
  - 2-module / 3-module design enables you to add a touch module with one or two power supply modules, network connection or multimedia.
  - Black / White elegant design suitable for almost any interior.
- GBP3-60 panel is equipped with six customizable touch buttons whose function can be software adapted to the requirements of the investor. Of course there is the possibility of using the "Master OFF", then you can select functions for switching and dimming of lighting, shading control, different scenarios etc.
- Printing is possible to customize to the investor requirements.
- GBP3-60 can be equipped with a number of modules, for example.
  - Power AC sockets: French, British, Multi, and Shockproof
  - Other types of modules: USB, LAN, Media
- The GBP3-60 panel is equipped with an ambient light sensor.
- Individual symbols can be illuminated in one of three colours - red, green and blue.
- GBP3-60 are designed for mounting into triple installation box (distance between the centres of each of openings is 71 mm).

Connection

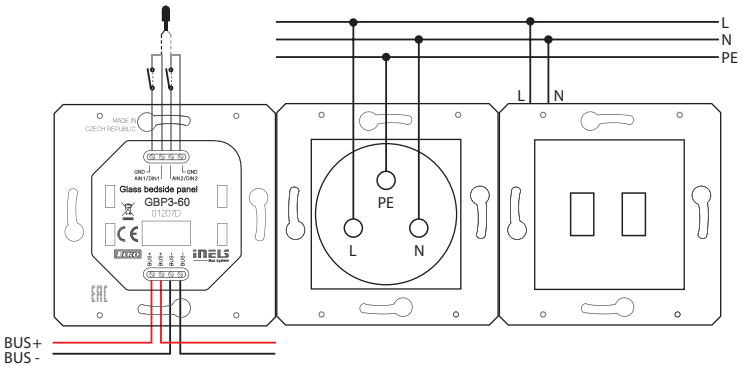

Switch




One switch / 1M	One switch / 2M	Three switches
11B (20001)	12B (20001.2)	14B (20003)
11W (20001.B)	12W (20001.2.B)	14W (20003.B)

Push button



One Push button / 1M	One Push button / 2M
49B (20008)	50B (20008.7)
49W (20008.B)	50W (20008.7.B)

Socket

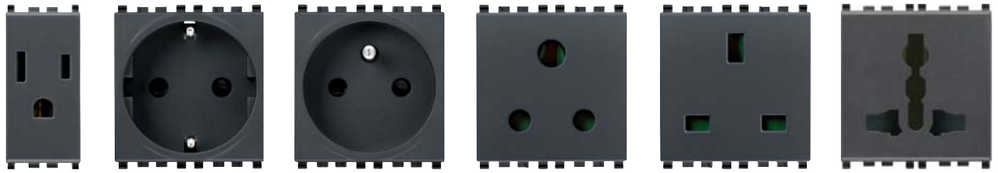

USA outlet	Schuko outlet	French outlet	3 PIN outlet	British outlet	Multistandard outlet
21B (20242)	22B (20208)	23B (20212)	24B (20214)	25B (20219)	26B (20257)
21W (20242.B)	22W (20208.B)	23W (20212.B)	24W (20214.B)	25W (20219.B)	26W (20257.B)

Data & Audio/Video



USB power supply unit	TV-FM-SAT socket outlet	VGA connector
20B (20295)	31B (20303)	32B (20348)
20W (20295.B)	31W (20303.B)	32W (20348.B)




TV outlet	Phone outlet	A/V connectors	UTP outlet	USB supply unit	Switch (CBs)	HDMI connector	USB outlet
41B (20313)	42B (20320)	43B (20335)	44B (20337.6)	48B (20292)	46B (20405.06)	47B (20346.H)	45B (20345)
41W (20313.B)	42W (20320.B)	43W (20335.B)	44W (20337.6.B)	48W (20292.B)	46W (20405.06.B)	47W (20346.H.B)	45W (20345.B)

(Number in brackets is original Vimar product code)

Glass Bedside Panel


Configure bedside panel according to your request.

L (left option)

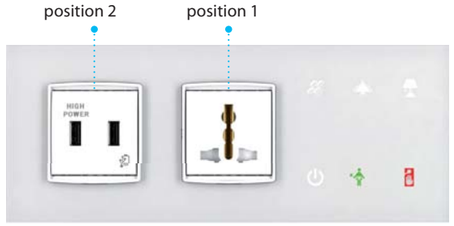


GBP3-60/WL/2F-26W-20W


R (right option)

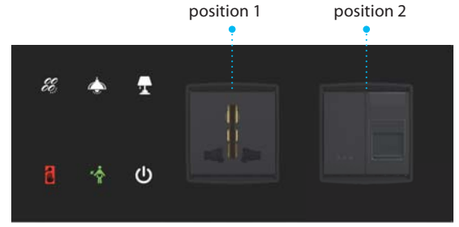

GBP3-60/BR/2F-26B-11B44B




GBP3-60/WL/1F-21W45W



GBP3-60/BR/1F-26B

Part number

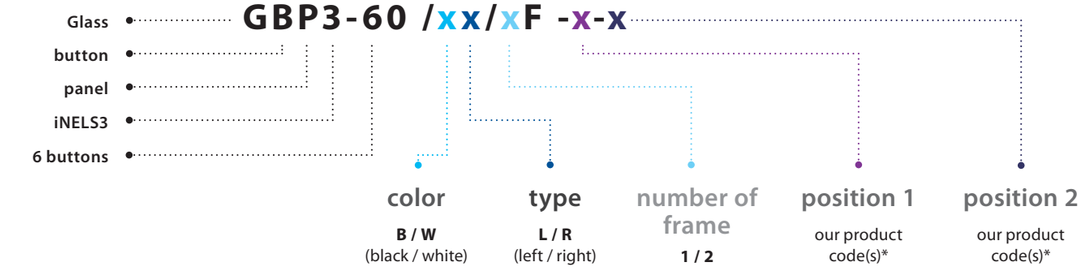

* In case of 1-module choice it is necessary to pick **2x** 1-module to fill up the 1 position, for example GBP3-60/WL/1F-**21W45W.**

Classic plate



Glass white ice / 2M	Glass black ice / 2M	Glass black ice / 3M	Glass black ice / 4M

If you have any question contact our sales representative.
For more information: **www.vimar.com/en/int/catalog/product**