Kiros-INT

VE780001



[Model variant]

230 Vac electronic smart thermostat with backlit display, weekly programming, for 2-module flush-mounted installation. Device designed for room temperature regulation in heating mode (winter) and cooling mode (summer). Suitable exclusively for flush-mounted devices in round boxes.

General features

- For installation on 2-module round flush-mounted boxes with 60 mm diameter.
- Display showing measured temperature and set programming
- Terminal block on the back of the device for connecting load and power supply
- Automatic weekly programming with 3 temperature levels (T1, T2, T3)
- Temperature control: on/off (with adjustable differential) or proportional
- Temperature compensation of +/-5 °C via settable parameter
- Anti-freeze temperature to prevent system freezing when the device is in OFF state
- Blue display backlight (can be switched off)
- Timing function: Maintains the current operating mode (automatic, manual, or off) for a set period of time, after which the device automatically switches to the specified mode.
- Delay function (configurable for each hour): adjusts the temperature for the first 15, 30, or 45 minutes of the current hour according to the temperature level set for the previous hour
- Possibility to reduce the range of settable temperatures (factory preset 2 ÷ 50 °C)
- Automatic changeover between standard time and daylight saving time
- Keypad lock function with password to prevent modifications by unauthorised people
- Classification according to point 6 of European Commission Communication 2014/C 207/02: class IV
- White and anthracite grey front panels included in the package
- Metal bracket included to adapt the instrument to the cover cover frames of the major international residential series

Technical specifications

Power supply	
Power supply	230 Vac (-15% ÷ +15%)
Frequency	50 / 60 Hz
Power reserve	72 hours
Temperature settings	
Settable temperatures	3 + antifreeze + manual
Temperature setting range Manual	2 ÷ 50 °C
Temperature setting range Automatic	2 ÷ 50 °C
Temperature setting range Antifreeze (Off)	OFF, 1 ÷ 50 °C

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.

Revision date: 2026-02-02

Temperature settings	
Measured temperature compensation range	- 5 ÷ 5 °C
Parameter settings	
Type of adjustment	ON-OFF or proportional
Differential/Hysteresis	0.1 ÷ 1 °C
Modes of operation	Summer Winter
Programming	Weekly
Programming resolution	1 hour
Measure	
Temperature measuring range	0 ÷ 50 °C
Temperature display resolution	0.1 °C
Temperature measurement accuracy	0.5 °C
Functions	
Keypad lock function	✓
Delay function	✓
Measured temperature compensation function	✓
Operating conditions	
Operating temperature range	0 ÷ 50 °C
Relative humidity	20% ÷ 90% non-condensing RH
Storage temperature range	-25 ÷ 70 °C
Approvals and certifications	
Classification according to point 6 of Communication 2014/C 207/02 of the European Commission:	Class IV
Viewing	
Display	Backlit LCD
Outputs	
Relay number	1
Relay type	Normally open
Relay capacity at 250 Vac	5 A
Mechanical features	
Protection degree	IP40
Physical features	
Color	White Anthracite grey
Device command	Keys
Backlighting	✓
Backlight color	Blue

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.

Overall dimensions	
Height (A)	40 mm
Width (B)	40 mm
Depth (C)	42 mm

Dimensions

Front View

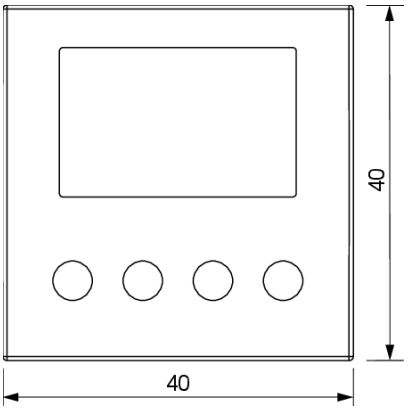

Side View

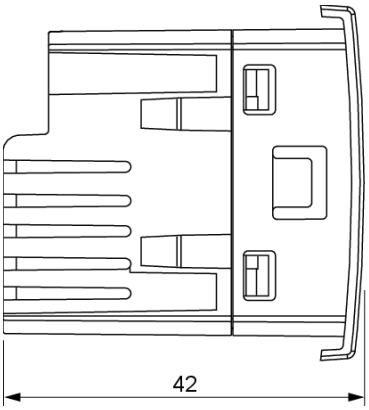

Wiring diagram



Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.

Compatible cover frames

Berker
Berker B3 series

Berker
Berker B7 series

Berker
Berker K1 series

Berker
Berker K5 series

Berker
Berker Q1 series

Berker
Berker Q7 series

Berker
Berker S1 series

Busch-Jaeger
Busch-Jaeger FUTURE LINEAR

Busch-Jaeger
Busch-Jaeger REFLEX SI

Busch-Jaeger
Busch-Jaeger REFLEX SI LINEAR FUTURE

Busch-Jaeger
Busch-Jaeger AXCENT series

Busch-Jaeger
Busch-Jaeger CARAT series

Busch-Jaeger
Busch-Jaeger DURO 2000 SI series

Busch-Jaeger
Busch-Jaeger DURO 2000 SI LINEAR series

Busch-Jaeger
Busch-Jaeger SOLO series

Gira
Gira E2 series

Gira
Gira E3 series

Gira
Gira EVENT series

Gira
Gira F100 series

Gira
Gira STANDARD 55 series

Jung
Jung A 550 series

Jung
Jung AS series

Jung
Jung CD 500 series

Jung
Jung LS 990 series

Merten
Merten 1-M

Merten
Merten ATELIER-M series

Merten
Merten M-PLAN series

Merten
Merten M-PURE series

Merten
Merten M-SMART series

For information on whether different cover frames can be used, contact the technical service department

Accessories compatible with the product

Fr.Kiros Argento

VE780900

Silver-coloured front panel
for Kiros

Reference standards

Compliance with Community Directives:

• 2014/35/UE (LVD) • 2014/30/UE (EMCD) • 2011/65/UE e 2015/863/UE (ROHS)

is declared with reference to the following Standards:

• EN IEC 60730-2-7 • EN IEC 60730-2-9 • EN IEC 63000

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.