Rx.fancoil

VE336400

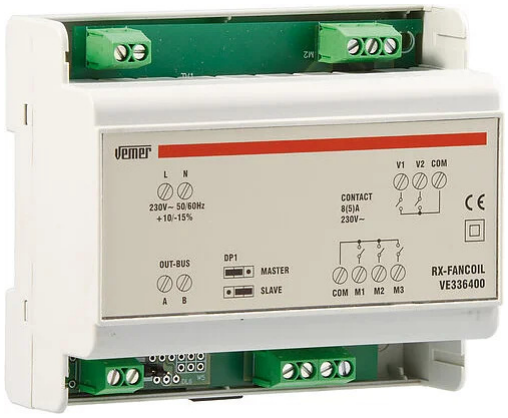

Remote actuator for 230 Vac 2- or 4-pipe three-speed fan coil with DIN-rail mounted. Must be combined with Klio Fancoil.

General features

- Three monostable relay outputs with dry contact 8(5) A / 250 Vac for fans
- two monostable relay outputs with dry contact 8(5) A / 250 Vac for solenoid valves
- contact capacity: 2000 VA (240 W)

Technical specifications

Power supply	
Power supply	230 Vac (-15% ÷ +10%)
Frequency	50 / 60 Hz
Operating conditions	
Operating temperature range	0 ÷ 50 °C
Relative humidity	20% ÷ 90% non-condensing RH
Storage temperature range	-25 ÷ 70 °C
Outputs	
Relay number	5
Relay type	Normally open
Relay capacity at 250 Vac	8 (5) A
Terminations	
Maximum cable cross-section	0.75 mm²
Overall dimensions	
Height (A)	92 mm
Width (B)	108 mm
Depth (C)	49 mm

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.

Revision date: 2026-02-02

Dimensions

Front View

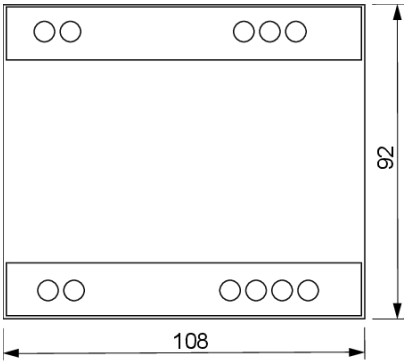

Side View

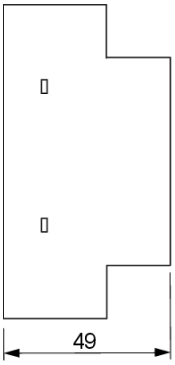

Wiring diagram



Reference standards

Compliance with Community Directives:

• 2014/35/UE (LVD) • 2014/30/UE (EMCD) • 2011/65/UE e 2015/863/UE (ROHS)

is declared with reference to the following Standards:

• EN IEC 60730-2-9 • EN IEC 61000-6-1 • EN IEC 61000-6-3 • EN IEC 63000

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.