# NAPA-W

VP885800






Electromechanical time switch, 230 Vac, 84-tripper, weekly programming. The device features a power reserve thanks to a built-in rechargeable, non-replaceable battery. Installation can be wall-mounted, panel-mounted or DIN-rail mounted.

## General features

- Three-position selector switch:
  - 0 permanently off
  - I permanently on
  - 🕒 automatic operation via trippers
- Accessory supplied for wall-mounted or DIN-rail mounted installation
- External dial with captive trippers
- Internal dial with hands for current time indication

## Technical specifications

| | |
|---|---|
| **Power supply** | |
| Power supply | 230 Vac (-10% ÷ +10%) |
| Frequency | 50 / 60 Hz |
| Absorption | 1.8 VA |
| Power reserve | 100 hours after an uninterrupted charge of 48 hours |
| **Parameter settings** | |
| Programming | Weekly |
| Minimum manoeuvring time | 120 min |
| **Measure** | |
| Watch accuracy | ± 1 second/day at 23 °C |
| **Operating conditions** | |
| Operating temperature range | -10 ÷ 45 °C |
| Insulation class | II |
| **Connectable loads** | |
| Incandescent lamps | 3000 W |
| Fluorescent lamps (neon) | 1200 VA |
| Halogen lamps (low voltage) | 2000 VA |

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.



Revision date: 2026-02-02

| | |
|---|---|
| **Connectable loads** | |
| Halogen lamps (230 V) | 3000 W |
| Low Consumption Lamps (CLF) | 1000 VA, 900 VA |
| LED lamps | 200 VA |
| **Viewing** | |
| Dial | 7 days |
| Number of trippers | 84 |
| **Outputs** | |
| Relay number | 1 |
| Relay capacity at 250 Vac | 16 (4) A |
| **Terminations** | |
| Maximum cable cross-section | 4 mm² |
| **Mechanical features** | |
| Protection degree | IP20 |
| **Physical features** | |
| Device command | Trippers |
| **Overall dimensions** | |
| Height (A) | 72 mm |
| Width (B) | 72 mm |
| Depth (C) | 54 mm |


Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.

## Dimensions

Front View

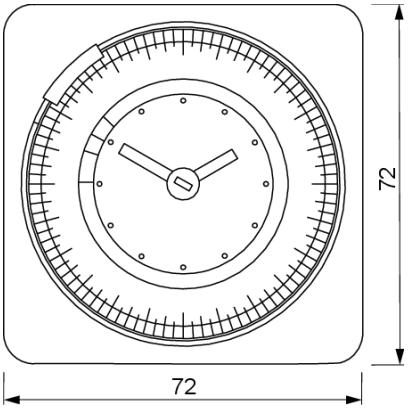


Side View

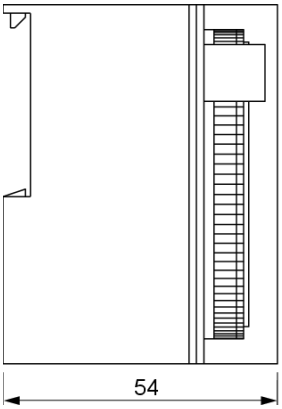


Drilling template for rear panel / panel mounting

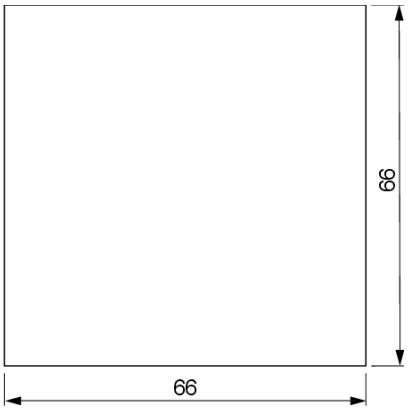


Rear-panel mounting

Drilling spacing for wall-mounted installation

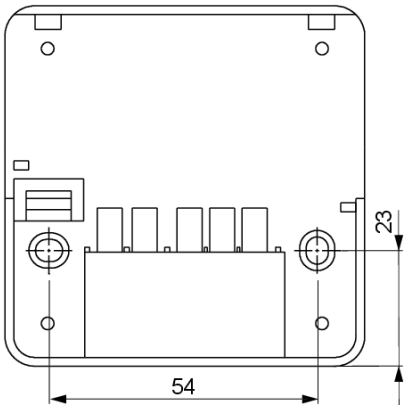


Wall mounting

## Wiring diagram




## Graphic details


Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.




## Reference standards

Compliance with Community Directives:

**• 2014/35/UE (LVD) • 2014/30/UE (EMCD) • 2011/65/UE e 2015/863/UE (ROHS)**

is declared with reference to the following Standards:

**• EN IEC 60730-2-7 • EN IEC 63000**


Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.