ARVO-W

VP883300



Electromechanical time switch, 230 Vac, 84-tripper, weekly programming. Backup power and replaceable battery via front drawer. DIN-rail mounted with 2.5 module size.

General features

- 84 trippers for activation time programming
- Each tripper covers 2 hours (120 minutes)
- Dial for setting hours and minutes
- Sealable keyboard cover
- Housing: 2.5-DIN modules
- Battery replacement drawer
- Three-position switch for setting the operating mode:
  - 0 always off
  - I always on
  - A automatic (according to programming set with trippers)

Technical specifications

Power supply	
Power supply	230 Vac (-10% ÷ +10%)
Frequency	50 / 60 Hz
Absorption	0.5 W
Buffer battery type	V80H NiMH 3 V (Rechargeable)
Power reserve	150 hours
Parameter settings	
Programming	Weekly
Minimum manoeuvring time	120 min
Measure	
Precision of manoeuvre	± 30 min
Watch accuracy	± 1 second/day at 23 °C
Operating conditions	
Operating temperature range	-10 ÷ 50 °C

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.

Revision date: 2026-02-02

Operating conditions	
Insulation class	II
Connectable loads	
Incandescent lamps	3000 W
Fluorescent lamps (neon)	1200 VA
Halogen lamps (low voltage)	2000 VA
Halogen lamps (230 V)	3000 W
Low Consumption Lamps (CLF)	1000 VA 900 VA
LED lamps	200 VA
Viewing	
Dial	7 days
Number of trippers	84
Outputs	
Relay number	1
Relay capacity at 250 Vac	16 (4) A
Terminations	
Maximum cable cross-section	4 mm²
Mechanical features	
Protection degree	IP20
Physical features	
Device command	Trippers
Overall dimensions	
Height (A)	88 mm
Width (B)	45 mm
Depth (C)	66 mm

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.

Dimensions

Front View

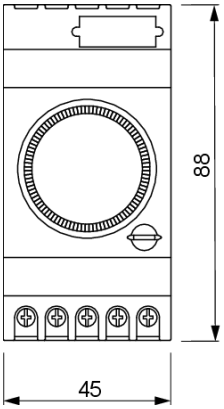

Side View

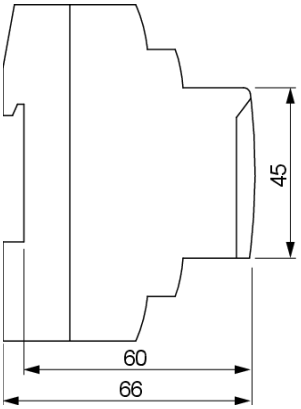

Wiring diagram



Graphic details



Accessories compatible with the product

V80H

VE787600

3 Volt button battery

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.

Reference standards

Compliance with Community Directives:

• 2014/35/UE (LVD) • 2014/30/UE (EMCD) • 2011/65/UE e 2015/863/UE (ROHS)

is declared with reference to the following Standards:

• EN IEC 60730-2-7 • EN IEC 63000

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.