Muvy DUO-INT

VE795301



[Model variant]

2-module 230 Vac flush-mounted twilight footlamp with motion sensor, automatically activating in low light when movement is detected within its range. This feature provides targeted and discreet lighting, perfect for signaling the way in low visibility environments, offering comfort and safety without wasting energy.

General features

- For installation on 2-module round flush-mounted boxes with 60 mm diameter.
- Light source: 1 white LED
- Equipped with motion sensor and twilight sensor

Technical specifications

Power supply	
Power supply	115 ÷ 230 Vac (-10% ÷ +10%)
Frequency	50 / 60 Hz
Absorption	2.5 (0.6) VA (W)
Settings	
Tripping time	30 seconds (if a new movement is detected during the timing, the count restarts)
Intervention Brightness Range	30 (fissa) lux
Functional characteristics	
Detection angle	110 °
Sensing range	7 meters
Light Intensity	10 lm
Operating conditions	
Operating temperature range	0 ÷ 50 °C
Relative humidity	20% ÷ 90% non-condensing RH
Storage temperature range	-25 ÷ 70 °C
Terminations	
Maximum cable cross-section	1.5 mm²
Mechanical features	
Protection degree	IP40

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.

Revision date: 2026-02-02

Muvy DUO-INT

VE795301

Physical features	
Color	Opal white
Overall dimensions	
Height (A)	44 mm
Width (B)	43 mm
Depth (C)	43 mm

Dimensions

Front View

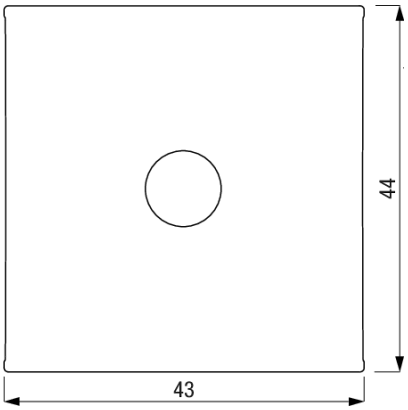

Side View

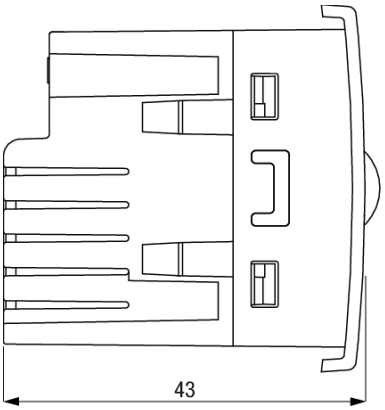

Wiring diagram



Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.

Compatible cover frames

Berker
Berker B3 series

Berker
Berker B7 series

Berker
Berker K1 series

Berker
Berker K5 series

Berker
Berker Q1 series

Berker
Berker Q7 series

Berker
Berker S1 series

Busch-Jaeger
Busch-Jaeger FUTURE LINEAR

Busch-Jaeger
Busch-Jaeger REFLEX SI

Busch-Jaeger
Busch-Jaeger REFLEX SI LINEAR FUTURE

Busch-Jaeger
Busch-Jaeger AXCENT series

Busch-Jaeger
Busch-Jaeger CARAT series

Busch-Jaeger
Busch-Jaeger DURO 2000 SI series

Busch-Jaeger
Busch-Jaeger DURO 2000 SI LINEAR series

Busch-Jaeger
Busch-Jaeger SOLO series

Gira
Gira E2 series

Gira
Gira E3 series

Gira
Gira EVENT series

Gira
Gira F100 series

Gira
Gira STANDARD 55 series

Jung
Jung A 550 series

Jung
Jung AS series

Jung
Jung CD 500 series

Jung
Jung LS 990 series

Merten
Merten 1-M

Merten
Merten ATELIER-M series

Merten
Merten M-PLAN series

Merten
Merten M-PURE series

Merten
Merten M-SMART series

For information on whether different cover frames can be used, contact the technical service department

Reference standards

Compliance with Community Directives:

• 2014/35/UE (LVD) • 2014/30/UE (EMCD) • 2011/65/UE e 2015/863/UE (ROHS)

is declared with reference to the following Standards:

• EN IEC 60598-2-2 • EN IEC 60598-1 • EN IEC 63000

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.