LPG Sensor

VE206900

Gas detectors / Gas and safety



Probe for connection to SRG / SRG.4 control units for LPG gas detection. Wall-mounted installation, vertical position, with supplied screws and plugs

General features

- Power supply from the SRG / SRG.4 control unit
- Average life of five years from date of installation
- Gas detected: LPG

Technical specifications

Power supply	
Power supply	From SRG / SRG.4 control unit
Absorption	40 mA
Parameter settings	
Intervention threshold	12% L.I.E.
Functional characteristics	
Sensor type	For LPG gas
Operating conditions	
Operating temperature range	0 ÷ 50 °C
Storage temperature range	-10 ÷ 50 °C
Terminations	
Termination type	Terminal blocks
Maximum cable cross-section	2.5 mm²
Mechanical features	
Protection degree	IP42
Physical features	
Sensor lifetime	5 years from the date of installation
Overall dimensions	
Height (A)	75.3 mm
Width (B)	119 mm
Depth (C)	36 mm

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.

Revision date: 2026-02-02

LPG Sensor

VE206900

Dimensions

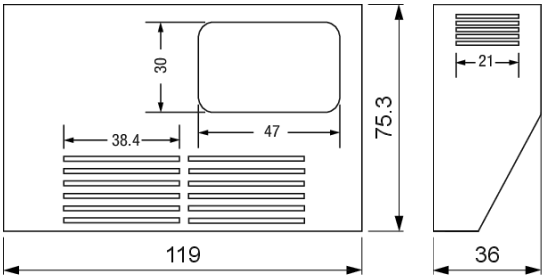

Wiring diagram



Reference standards

Compliance with Community Directives:

• 2014/35/UE (LVD) • 2014/30/UE (EMCD) • 2011/65/UE e 2015/863/UE (ROHS)

is declared with reference to the following Standards:

• EN 60730-1 • EN 50270 • EN IEC 63000

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.