Energy-230 D63

VN973400



Static energy meter with LCD display, for active energy measurement in single-phase 230 Vac systems. 230 Vac power supply, DIN-rail mounted (3-module), direct current input up to 63 A, with backlit LCD display and pulse output.

General features

- Total energy meter
- Partial energy meter
- Consumption count LED
- Power supply LED
- Programming key
- Base current: 10 A
- Maximum measurable current: 63 A
- Installation via direct insertion of the power cable (max. cross-section 25 mm²) into a vertical slot on the enclosure body
- LCD display with 7 digits (total energy) + 5 digits (partial energy)
- Active energy consumption indication: 1 LAMP = 10 Wh
- Pulse output for PC display of consumed energy via dedicated software and the corresponding concentrator module
- Galvanically isolated amperometric input
- Incorrect insertion indication

Technical specifications

Power supply	
Power supply	230 Vac (-15% ÷ +10%)
Frequency	50 / 60 Hz
Measure	
Energy display resolution	0.1 kWh
Active energy measurement accuracy	Class 1 (EN IEC 62053-21)
Voltage circuit absorption	<2,5 VA
Current circuit absorption	< 2,5 VA
AC current range	63 A
Type of insertion - current	Direct through through-hole
Starting current	< 40 mA
Basic current	10 A

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.

Revision date: 2026-02-02

Energy-230 D63


VN973400

Measure	
Nominal - rated current	10 A
Maximum current	63 A
Operating conditions	
Operating temperature range	-10 ÷ 45 °C
Relative humidity	10% ÷ 90% non-condensing RH
Storage temperature range	-25 ÷ 70 °C
Viewing	
Display	Backlit LCD
Digits number	7 (total energy) 5 (partial energy)
Outputs	
Optoisolated pulse output	✓
Pulse weight	0.1 kWh
Pulse duration	100 ms
Pulse output current	< 20 mA
Output pulse voltage	9 ÷ 24 Vdc
Terminations	
Termination type	Terminal blocks
Maximum cable cross-section	(voltage input) 2.5 mm² (current input) 25 mm² (pulse output) 2.5 mm²
Mechanical features	
Protection degree	IP20 IP51 (on the front)
Overall dimensions	
Height (A)	87 mm
Width (B)	54 mm
Depth (C)	65 mm


Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.

Dimensions


Front View

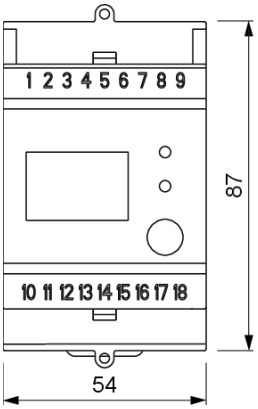

Side View

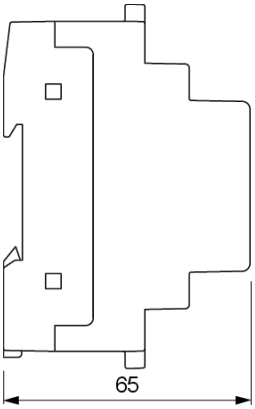

Wiring diagram



Accessories compatible with the product

CLIP-485

VN905600

Energy series concentrator module for meters

LAN-485

VE304200

LAN/RS-485 interface + software (on request)

Energy-View

VN970000

System consisting of a USB/RS-485 interface and software for energy meters

Reference standards

Compliance with Community Directives:

• 2014/35/UE (LVD) • 2014/30/UE (EMCD) • 2011/65/UE e 2015/863/UE (ROHS)

is declared with reference to the following Standards:

• EN 61010-1 • EN IEC 62052-11 • EN IEC 62053-21 • EN IEC 63000

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.