ESL

VR448300



Single-pole electrode for level control of electrically conductive liquids, used with liquid level control relay.

General features

- Small-size electrode with nylon electrode holder for protection against accidental contact
- A cable grommet and sealing ring prevent water contact, preventing oxidation of the terminal.
- It is used in metallic and non-metallic tanks, and in wells, even of small diameter

Technical specifications

Power supply	
Power supply	50 Vac (maximum)
Overall dimensions	
Length (L)	96 mm
Diameter dimension	
Dimension Ø - A	20 mm

Dimensions

Total View

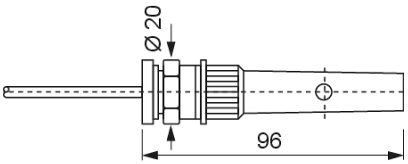

Product variants

ES

VR449100

Immersion electrode with ballast

EST

VR450900

Tank electrode with threaded connection

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.

Revision date: 2026-02-02

Reference standards

Compliance with Community Directive:

• **2011/65/UE e 2015/863/UE (ROHS)**

is declared by reference to the following Standard:

• **EN IEC 63000**

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.