HR-2P7A

VM647500



Digital panel controller (72x72) suitable for humidity control. The device can be connected to linear sensors.

General features

- Parameter setting in digital mode:
  - Set-point
  - Differential
  - Neutral zone
  - Output actuation times
  - Function and digital input delay time
  - Alarm delay time / Buzzer enable
  - Probe calibration OFFSET
  - Displayed resolution
  - Temperature unit of measurement
  - Measurement display filter (refresh rate)
  - Probe input type
  - Password
- Modes of operation (adjustment)
  - ON/OFF Direct and/or Reverse action with or without Neutral Zone
  - PWM Direct, Reverse action with or without Neutral Zone
  - ALARM
- 2 independent setpoints
- Acoustic and visual alarm signalling for:
  - probe alarm (malfunction)
  - minimum or maximum alarm

Technical specifications

Power supply	
Power supply	24 / 230 Vac (-10% ÷ +10%)
Frequency	50 / 60 Hz
Absorption	4.5 VA

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.


Revision date: 2026-02-02

Measure	
Humidity display resolution	0,1 (per valori compresi nel campo 0 ÷ 99,9), 1 (per valori <-9,9 e > 99,9) RH
Humidity measurement accuracy	± 0,5% del valore di fondo scala ± 1 digit RH
Functions	
Keypad lock function	✓
Probe alarm buzzer	✓
Functional characteristics	
Humidity display range	0 ÷ 100 RH
Operating conditions	
Operating temperature range	0 ÷ 50 °C
Relative humidity	< 80% RH
Storage temperature range	-25 ÷ 70 °C
Viewing	
Display	Red LEDs
Digits number	3
Display range	0 ÷ 100 RH
Inputs	
Number of connectable probes	1
Type of connectable probes	Linear sensors (output 0-20 mA, 4-20 mA, 0-1 V)
Outputs	
Relay number	2
Relay type	Heat exchange
Relay capacity at 250 Vac	8 A
Probe power supply	9 Vdc (max 30 mA)
Mechanical features	
Protection degree	IP54 (on the front) IP20 (on terminals)
Overall dimensions	
Height (A)	72 mm
Width (B)	72 mm
Depth (C)	114 mm


Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.

Dimensions


Front View



Side View

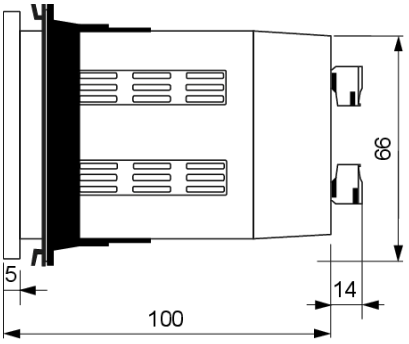

Wiring diagram




Probe input:

- 0÷1 V
- 4÷20 mA
- 0÷20 mA

Active probe output power:

- 9 Vdc max 30 mA




Probe input:

- 0÷1 V
- 4÷20 mA
- 0÷20 mA

Active probe output power:

- 9 Vdc max 30 mA



Probe input:

- 0÷1 V
- 4÷20 mA
- 0÷20 mA

Accessories compatible with the product

SUR 2

VN873600

Humidity sensor providing a voltage or current signal proportional to the measured humidity

EVAD

VJ44580000

Adapter for panel-mounted devices, from 72 × 72 mm to 96 × 96 mm.

EVCOP

VJ44820000

Protective cover for panel-mounted devices, 72×72 mm.

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.

Reference standards

Compliance with Community Directives:

• 2014/35/UE (LVD) • 2014/30/UE (EMCD) • 2011/65/UE e 2015/863/UE (ROHS)

is declared with reference to the following Standards:

• EN IEC 60730-2-13 • EN IEC 63000

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.