Velux

VJ57030000



Twilight switch with adjustable intervention threshold, designed for wall or pole installation, using the support included in the package.

General features

- Shockproof polycarbonate resin cover
- Cable grommets for cables with a maximum sheath diameter of 15 mm
- Connectable loads:
  - Incandescent lamps: 800 W / 230 V
  - Fluorescent lamps: 360 W / 230 V (cosφ ≥ 0.8)
- Output: relay with normally open (NO) contact
- Maximum cable gland hole diameter: 15 mm
- Terminal block for conductors with a maximum cable cross-section of 1.5 mm²

Technical specifications

Power supply	
Power supply	230 Vac (-15% ÷ +10%)
Frequency	50 / 60 Hz
Absorption	3 (0.5) VA (W)
Parameter settings	
Differential/Hysteresis	4 lux (fixed differential)
Settings	
Tripping time	10 seconds (fixed)
Intervention Brightness Range	3 ÷ 70 lux
Operating conditions	
Operating temperature range	0 ÷ 50 °C
Relative humidity	20% ÷ 90% non-condensing RH
Storage temperature range	-25 ÷ 70 °C
Connectable loads	
Incandescent lamps	800 W
Fluorescent lamps (neon)	360 W

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.

Revision date: 2026-02-02


Velux

VJ57030000


Outputs	
Relay number	1
Relay capacity at 250 Vac	10 A
Terminations	
Maximum cable cross-section	1.5 mm²
Mechanical features	
Protection degree	IP54
Overall dimensions	
Height (A)	79 mm
Width (B)	52 mm
Depth (C)	41 mm

Dimensions


Front View

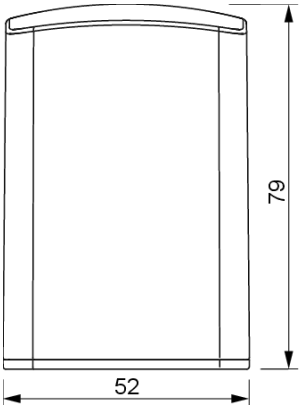

Side View

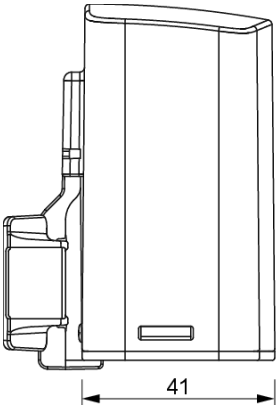


Wiring diagram



Graphic details

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.

Revision date: 2026-02-02



1. Cable grommet
2. Trimmer for threshold regulation

Reference standards

Compliance with Community Directives:

• 2014/35/UE (LVD) • 2014/30/UE (EMCD) • 2011/65/UE e 2015/863/UE (ROHS)

is declared with reference to the following Standards:

• EN 60669-2-1 • EN IEC 63000

Vemer S.p.A. declines all responsibility for the use of the products for purposes other than those for which they are intended, as indicated in the technical documentation. Vemer S.p.A. reserves the right to make, without prior notice, such changes as may, in its sole discretion, improve the technical and functional characteristics of the products and the related production logic. The technical characteristics and images of the products indicated are given for information only and are not binding in any way, since they may be modified without prior notice.